

EP0235257

Publication Title:

MULTIPLEXED DIGITAL PACKET TELEPHONE COMMUNICATION METHOD.

Abstract:

Abstract not available for EP0235257

Abstract of corresponding document: WO8701254

1255 An efficient system for simultaneously conveying a larger number of telephone conversations over a much smaller number of relatively low-bandwidth digital communication channels (20, 22). Each incoming telephone speech signal is filtered, periodically sampled, and digitized. An efficient computational speech compression algorithm is applied to transform a sequence of digitized speech samples into a much shorter sequence of compression variables. The compression variable sequence is further processed to construct a minimum-length bit string, and an identifying header is appended to form a packet. Only a few packets containing information on representative background noise are generated during pauses in speech, thereby conserving digital bandwidth. The packets are queued and transmitted asynchronously over the first available serial digital communication channel. Numerical feedback to the compression algorithm is employed which results in the packet size being reduced during periods of high digital channel usage. Data supplied from the esp@cenet database - Worldwide

Courtesy of <http://v3.espacenet.com>


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁴ : H04J 3/24, 15/00, H04B 1/66	A1	(11) International Publication Number: WO 87/01254 (43) International Publication Date: 26 February 1987 (26.02.87)
(21) International Application Number: PCT/US86/01721 (22) International Filing Date: 20 August 1986 (20.08.86) (31) Priority Application Number: 769,153 (32) Priority Date: 23 August 1985 (23.08.85) (33) Priority Country: US (71) Applicant: REPUBLIC TELCOM SYSTEMS CORPORATION [US/US]; 6150 Lookout Road, Boulder, CO 80301 (US). (72) Inventor: GOLLUB, Raphael; 301 Shellard Parkway, Apt. 348, St. Louis Park, MN 55426 (US). (74) Agents: PATTERSON, James, H. et al.; Dorsey & Whitney, 2200 First Bank Place East, Minneapolis, MN 55402 (US).	(81) Designated States: AT (European patent), AU, BE (European patent), BR, CH (European patent), DE (European patent), DK, FR (European patent), GB (European patent), IT (European patent), JP, KR, NL (European patent), NO, SE (European patent). Published With international search report.	

(54) Title: MULTIPLEXED DIGITAL PACKET TELEPHONE SYSTEM

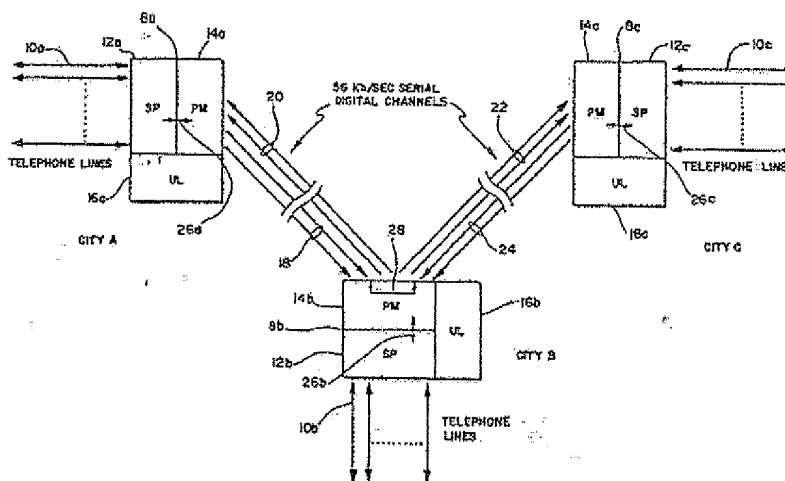

(57) Abstract

An efficient system for simultaneously conveying a larger number of telephone conversations over a much smaller number of relatively low-bandwidth digital communication channels (20, 22). Each incoming telephone speech signal is filtered, periodically sampled, and digitized. An efficient computational speech compression algorithm is applied to transform a sequence of digitized speech samples into a much shorter sequence of compression variables. The compression variable sequence is further processed to construct a minimum-length bit string, and an identifying header is appended to form a packet. Only a few packets containing information on representative background noise are generated during pauses in speech, thereby conserving digital bandwidth. The packets are queued and transmitted asynchronously over the first available serial digital communication channel. Numerical feedback to the compression algorithm is employed which results in the packet size being reduced during periods of high digital channel usage.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT Austria	GA Gabon	MR Mauritania
AU Australia	GB United Kingdom	MW Malawi
BB Barbados	HU Hungary	NL Netherlands
BE Belgium	IT Italy	NO Norway
BG Bulgaria	JP Japan	RO Romania
BR Brazil	KP Democratic People's Republic of Korea	SD Sudan
CF Central African Republic	KR Republic of Korea	SE Sweden
CG Congo	LI Liechtenstein	SN Senegal
CH Switzerland	LK Sri Lanka	SU Soviet Union
CM Cameroon	LU Luxembourg	TD Chad
DE Germany, Federal Republic of	MC Monaco	TG Togo
DK Denmark	MG Madagascar	US United States of America
FI Finland	ML Mali	
FR France		

-1-

MULTIPLEXED DIGITAL PACKET TELEPHONE SYSTEM

Technical Field

The invention disclosed herein pertains to multi-channel telephonic communications. In particular, it pertains to a system which utilizes
5 a small number of relatively low-bandwidth digital communication channels to asynchronously convey a much larger number of simultaneous telephone conversations in a digital packet format.

Background Art

10 Techniques for communicating telephone conversations in digital format have become commonplace in recent years. The telephone signal is usually filtered to limit its bandwidth and is then sampled at a rate that is at least twice the frequency of its highest
15 frequency component. The repetitive samples are applied to an A/D converter to obtain digital representations of the analog samples. Although volume compression and expansion may be utilized to increase the system's dynamic range, it is generally conceded that at least
20 eight bits are required for each digital sample in order that the quantization noise be held to an acceptable minimum. Thus, the generally accepted digital bandwidth required to digitally communicate a telephone signal that is frequency-limited to 4 kilohertz, is at least
25 2 times 4 times 8, or 64 kilobits per second.

Synchronous time-division multiplexing (TDM) is generally employed to simultaneously carry a plurality of digitized telephone conversations over a single digital channel. With synchronous TDM, each digital

-2-

telephone channel occupies a precise "time slot" in a high bit-rate serial data sequence. Synchronous TDM accommodates a fixed number of telephone channels and requires that a "time slot" be assigned to each channel whether or not the channel is being used. Such inflexibility can be very wasteful of digital bandwidth. To accommodate 40 unidirectional telephone channels by conventional synchronous TDM would require a digital bandwidth of approximately 40 times 64 kilobits, or 2.56 megabits per second.

It is desirable for economic reasons to increase the digital efficiency of a telephone system so that a large number of telephone channels can be accommodated by a given digital bandwidth. The digital efficiency of conventional TDM can be increased by the use of digital speech interpolation (DSI) techniques. With DSI, a "time slot" is only assigned to a particular telephone channel during periods of actual speech and is dynamically reassigned to another telephone channel during a speech pause. Since pauses are known to occupy about 60 percent of a typical speech pattern, DSI can theoretically increase digital efficiency by about a factor of 2.5. Because of statistical variations in speech patterns, however, a factor of 1.5 is more typically obtained in practice. In addition, DSI efficiency is further reduced by the fact that a "channel assignment table" must be transmitted each TDM cycle to permit the receiver to unambiguously identify the current occupant of each "time slot".

Instead of synchronously transmitting individual digital samples of speech in TDM "time slots", longer sequences of samples can be assembled and transmitted asynchronously as packets - each packet being identified by a packet "header". As with DSI TDM, the digital efficiency of a multiplexed packet telephone system can be increased by a factor of about 1.5 by suppressing speech pauses and transmitting only packets containing samples obtained during spurts of actual speech.

-3-

Because of the asynchronous nature of packet transmission, however, such systems have required that a "time stamp" be appended to each sequence of actual speech samples so that the appropriate speech pauses could be correctly re-inserted at the receiving terminal. Such "time stamping" increases packet overhead and seriously complicates the speech reconstruction process. An example of a multiplexed speech transmission system employing "time stamped" packets of digitized speech samples has been disclosed in Flanagan U.S. Patent No. 4,100,377.

Recent advances in technology have provided means for new approaches to increasing the digital efficiency of multiplexed digital telephone systems. In particular, the recent development of high-performance microprocessors capable of many complex calculations per second has made possible the real-time implementation of powerful, but computationally intensive, speech compression algorithms. A variety of such computational algorithms are presently available and are well-known to those of ordinary skill in the art. Such algorithms typically rely upon the principles of time-domain harmonic scaling, transform coding, linear or adaptive predictive coding, sub-band coding, or combinations thereof.

All such computational speech compression algorithms share one common feature. They can effectively transform relatively large groups of digitized speech samples into much smaller sequences, or "frames", of digital compression variables at the transmitting end of a circuit for transmission efficiency, and then expand the frames at the receiving end to approximate the original larger groups of speech samples while still maintaining acceptable speech fidelity. Using techniques that are known to those of ordinary skill in the art, compression ratios - defined as the number of bits in a frame of digital compression variables divided by the number of bits in the corresponding

-4-

group of digital speech samples - of less than .25
can presently be routinely achieved with computational
algorithms which still maintain telephone-quality
speech. The real-time implementation of such
5 computational speech compression algorithms in a
multiplexed digital telephone system has, however,
not heretofore been accomplished.

Summary of the Invention

The telephone system herein disclosed is
10 a highly efficient system for conveying a large number
of simultaneous telephone conversations (e.g., 40)
over a much smaller plurality (e.g., 4) of relatively
low-bandwidth digital channels (e.g., 56 kb/sec) in
digital packet format. Low-bandwidth digital channels
15 of the type employed herein have heretofore been used
only for data communication since even a small number
of digitized telephone signals have traditionally
required a much wider bandwidth.

In the present invention, each incoming
20 telephone speech signal is filtered, periodically
sampled, and digitized. An efficient computational
speech compression algorithm is applied to successive
groups of digitized speech samples; each group being
representative of a speech interval ranging in duration
25 from about 15 milliseconds to about 50 milliseconds.
This computational algorithm transforms each group
of samples into a much smaller sequence, or "frame",
of digital speech compression variables. The compression
ratio of the transformation, defined to be the ratio
30 of the number of bits in a frame to the number of
bits in the corresponding group of digital samples,
is less than 0.25.

Each frame of digital compression variables
is further processed to construct a minimum-length
35 bit string, and an identifying header is appended
to each string to form a packet. Only a few packets

-5-

containing information on representative background noise are generated during pauses in speech in order to conserve digital bandwidth.

Each packet is queued, along with similar packets derived from other similar telephone channels, and transmitted asynchronously over the first available one of a number of serial digital communication channels operating at, e.g., 56 kilobits per second. Numerical feedback to the microprocessor implementing the computational speech compression algorithm is employed which results in the packet size being dynamically reduced during periods of high digital channel usage. Packet header information is utilized to establish a "virtual circuit" between sender and receiver. The packets may be transmitted from the sender to the receiver via intermediate terminals along the "virtual circuit". The packets are requeued at each intermediate terminal, along with the packets generated at the intermediate terminal, and are asynchronously retransmitted from the intermediate terminal over the first available one of a plurality of serial digital channels.

The packet header is employed to route the packet to the circuitry servicing the appropriate telephone channel at the ultimate receiving terminal. The packeting procedure is thereupon reversed. The header is stripped from the packet and the minimum-length bit string is expanded to recover the frame of digital speech compression variables. Approximations to the original digitized speech samples are synthesized from the recovered speech compression variables by means of an appropriate computational inverse speech compression algorithm. An intentional delay is thereupon introduced to build a backlog pool of samples to buffer against gaps in speech due to statistical fluctuations in packet arrival times. Digital samples from this pool are periodically outputted to a D/A converter

-6-

and its analog output is appropriately filtered to approximately reproduce the original frequency-limited telephone signal. Representative background noise is synthesized during pauses in speech from information contained in previously received background information packets.

In the invention disclosed herein, the need for "time stamping" the speech data as in Flanagan U.S. Patent No. 4,100,377 is totally avoided. This desirable result is primarily due to the fact that the maximum speech interval represented by an individual packet according to the present invention is only about 50 milliseconds - a time that is substantially less than the length of a typical speech spurt. In contrast, Flanagan's much longer packets contain at least one speech spurt and may contain several. Thus, since packets of the present invention are inherently smaller than those of Flanagan, packet delays as well as variations therein will also be inherently smaller. furthermore, since a speech spurt comprises many packets, the time interval between the reception of the packet containing the last frame at the end of a speech spurt and the reception of the packet containing the first frame at the beginning of the next speech spurt will correspond approximately to the actual length of the pause between the two spurts in real time. Finally, the present invention takes advantage of the fact that the human ear is highly insensitive to small variations in the lengths of the pauses between speech spurts. Thus, no attempt is made to accurately reproduce the lengths of these pauses. In fact, as will be discussed more fully herein below, speech pauses are treated as flexible parameters in setting up the FIFO buffers which smooth out potential variations in timing of outputted speech samples which could arise from statistical fluctuations in speech packet arrival times.

-7-

One object of the invention herein disclosed is to provide a digital telephone system employing the novel implementation of real-time digital signal processing to obtain digital efficiencies greater
5 than those obtained in conventional telephone systems.

Another object of this invention is to provide a multiplexed digital telephone system employing asynchronously transmitted data packets to avoid the wasted digital channel capacity associated with synchronous
10 time division multiplexing but without the necessity for "time-stamping" the packets.

Another object of this invention is to provide a multiplexed digital packet telephone system wherein digital efficiency is enhanced by generally transmitting packets only during periods of actual speech
15 and wherein background noise is synthesized at the receiving terminal during pauses in speech by using stored information obtained from occasionally transmitted background information packets.

Another object of the present invention is to provide a multiplexed digital packet telephone system wherein speech gaps due to statistical fluctuations in packet arrival times are avoided by sufficiently
20 delaying the outputting of digital speech samples at the receiving terminal to build a backlog pool of such samples to buffer against such gaps.

Another object of this invention is to provide a multiplexed digital packet telephone system employing numerical feedback to dynamically adjust the computational
25 speech compression algorithm in accordance with the total digital data load in order to accommodate a large number of telephone channels but still reduce the likelihood of packet discards during temporary periods of high data loading of the serial digital
30 channels.

Still another object of the present invention is to provide a high-capacity digital multiplexed

-8-

telephone system which utilizes a plurality of relatively low-bandwidth serial communication channels of the type that are normally used only for data communication rather than a single higher-bandwidth channel in order to derive economic advantages therefrom.

These, and other, objects of the present invention will become apparent from a reading of the detailed description herein below together with the appended claims.

Brief Description of the Drawings

Fig. 1 is a block diagram of a simple multiplexed digital telephone system comprising three digital telephone terminals located at three different cities in accordance with the present invention.

Fig. 2 is a block diagram of a single digital telephone terminal in accordance with the present invention showing its common bus structure and the interconnection of the terminal's constituent printed circuit boards.

Fig. 3 is a block diagram of any one of the Speech Processor Boards, SPB-1 through SPB-3, identified in Fig. 2.

Fig. 4 is a block diagram of either of the Packet Multiplexer Boards, PMB-1 or PMB-2, identified in Fig. 2.

Fig. 5 is a schematic representation of two packet formats employed in communicating over the digital communication channels in accordance with the present invention.

Detailed Description of the Drawings

Referring now to Fig. 1, a simple multiplexed digital packet telephone system in accordance with the present invention is represented in block diagram form. The system comprises three digital telephone terminals, represented generally as 8a, 8b, and 8c, located in three different cities denoted as City A, City B, and City C. In each city, a plurality

-9-

of bi-directional telephone lines 10a, 10b, or 10c coming from a Telephone Company Central Office or PBX switchboard interfaces with a Speech Processor (SP) section 12a, 12b, or 12c of the appropriate
5 corresponding digital telephone terminal 8a, 8b, or 8c. In addition to a Speech Processor section, each terminal further comprises a Packet Multiplexer (PM) section 14a, 14b, or 14c and a Utility Logic (UL) section 16a, 16b, or 16c. Packet Multiplexer sections
10 14a, 14b, and 14c interface with a small plurality of unidirectional serial digital channels 18, 20, 22, and 24 interconnecting the cities and carrying digital information in opposite directions at an individual channel rate of, e.g., 56 kilobits per
15 second.

Still referring to Fig. 1, the implementation of a telephone call from a user in City A to another user in City C may be described by the following sequence of events:

20 Circuitry within Speech Processor section 12a of terminal 8a detects "off-hook" status and decodes the dial code inputted on one of the plurality of telephone lines 10a. This dial code, which may be in either pulse-dial (i.e., rotary-dial phone) or
25 DTMF (Dual Tone Multi Frequency - i.e., "Touchtone") format, indicates that the call's recipient is in City C. In response, Speech Processor section 12a constructs appropriate signalling packets which are communicated to Packet Multiplexer section 14a via
30 internal communication path 26a. Packet Multiplexer section 14a, in turn, interchanges signalling packets with Packet Multiplexer section 14b in City B via first available ones of serial digital channel pluralities 18 and 20 and Packet Multiplexer section 14b interchanges
35 signalling packets with Packet Multiplexer section 14c in City C via first available ones of serial digital channel pluralities 22 and 24.

-10-

Using a standard Link Access Protocol (LAP B) to ensure accuracy, the terminals 8a, 8b, 8c intercommunicate and agree to establish a "virtual circuit" between the appropriate one of the plurality of telephone lines 10a in City A and another one of the plurality of telephone lines 10c interfacing terminal 8c at City C. Thereafter, for the duration of the call, all signalling and speech information communicated between these two telephone lines is digitized and coded into packets which are identified by particular address codes that are unique to this "virtual circuit".

Any such packet going from City A to City C is transferred via path 26a from Speech Processor section 12a to Packet Multiplexer section 14a where it is queued along with other similar packets and transmitted asynchronously to City B over the first available one of a plurality of serial digital channels 18. At City B, the packet is transferred over internal path 28, requeued, and retransmitted asynchronously to City C over the first available one of a plurality of serial digital channels 22. Upon arrival at City C, the packet is passed from Packet Multiplexer section 14c to Speech Processor section 10c via internal path 26c. The original speech or signalling information is then reconstructed from the digital information contained in the packets and the reconstructed speech is appropriately transferred to the predetermined one of the plurality of telephone lines 10c established by the "virtual circuit".

Speech or signalling information traveling in the reverse direction takes the opposite path. The speech or signalling information is appropriately digitized and coded into packets identified by a unique address code at Speech Processor section 12c at City C. Each such packet is then asynchronously transferred to the corresponding Speech Processor section 12a

-11-

at City A via internal path 26c, the first available one of a plurality of serial digital channels 24, internal path 28, the first available one of a plurality of serial digital channels 20, and internal path 26a.

5 The speech or signalling information is thereupon reconstructed and appropriately transferred to the agreed upon one of the plurality of telephone lines 10a established by the "virtual circuit".

10 Those skilled in the art will appreciate, from the foregoing explanation, that the Link Access Protocol could just as well have been used to ensure accuracy of messages establishing a "virtual circuit" between a user in City A and a user in City B or between
15 a user in City B and a user in City C. Such two-terminal "virtual circuits" would, of course, utilize internal communication path 26b rather than internal communication path 28 within digital telephone terminal
20 8b at City B. Those skilled in the art will also appreciate that the sequence of events described above can be extended and applied to larger systems comprising more than three digital telephone terminals.

Fig. 2 is a block diagram of a single digital telephone terminal such as one identified as either 8a, 8b, or 8c in Fig. 1. Fig. 2 discloses a Speech
25 Processor section 12, a Packet Multiplexer section 14, and a Utility Logic section 16 all interconnected by a Common Bus 40. Common Bus 40 comprises any standard multi-processor bus structure utilizing the "Master-Slave" concept and may, for example, comprise the Multibus
30 (TM) structure developed by the Intel Corporation of 3065 Bowers Avenue, Santa Clara, California.

Speech Processor section 12 in Fig. 2 comprises a plurality of Speech Processor Boards, SPB-1, SPB-2, etc., identified individually with the numeral 30.
35 Each Speech Processor Board 30 interfaces with at most two of the total plurality of telephone lines 10 which interface with Speech Processor section 12.

-12-

Thus, e.g., at least twenty Speech Processor Boards 30 would be required to interface with forty telephone lines 10. In addition to interfacing with two telephone lines, each Speech Processor Board 30 interfaces as a "Slave" to Common Bus 40. Because of its "Slave" status, a Speech Processor Board 30 cannot initiate a Common Bus transaction but can only respond to transactions initiated by a Common Bus "Master".

As also seen in Fig. 2, Packet Multiplexer section 14 comprises a plurality of Packet Multiplexer Boards, PMB-1, PMB-2, etc., identified individually as 32. Each Packet Multiplexer Board 32 interfaces with a group of from one to four outgoing serial digital channels 34 and with a group of from one to four incoming serial digital channels 36 as well as to Common Bus 40. The unidirectional serial digital channels comprising groups 34, 36 may, for example, operate at an individual data rate of 56 kilobits per second. Such relatively low-bandwidth channels are generally utilized for data communication only. (The groups of channels identified as 34, 36 in Fig. 2 correspond to the channels identified in Fig. 1 as 18, 20, 22, 24.) For a simple bidirectional system employing only two digital telephone terminals, one Packet Multiplexer Board 32 interfacing four outgoing and four incoming 56 kilobit/sec digital channels would normally be employed in each terminal for each twenty Speech Processor Boards 30 servicing forty bidirectional telephone lines.

A Packet Multiplexer Board 32 serves as a bus "Master" and initiates all Common Bus transactions on Common Bus 40. Although only one Packet Multiplexer Board 32 can serve as "Master" at any given time, all such boards 32 have "Master" capability and can assume control of Common Bus 40 by means of a standard prioritized bus exchange protocol. In a terminal comprising a plurality of Packet Multiplexer Boards 32, control of Common Bus 40 is time-shared among

-13-

the members of that plurality. It will be appreciated that the internal data paths denoted 26a, 26b, and 26c in Fig. 1 actually represent transactions between a Speech Processor Board 30 and a Packet Multiplexer Board 32 via common bus 40, and that internal data path 28 actually represents a transaction between two Packet Multiplexer Boards 32 via Common Bus 40.

Fig. 2 further discloses a Utility Logic section 16 comprising a single Utility Logic Board 38. Utility Logic Board 38 interfaces as a "Slave" to Common Bus 40 and can therefore not initiate Common Bus transactions. It comprises conventional hardware to provide the Speech Processor Boards 30 and the Packet Multiplexer Boards 32 with services not found elsewhere in the system. Such services include converting 15 volts dc to 12 volts dc for use by the Packet Multiplexer Boards 32; generating a 40 megahertz clock signal for the Speech Processor Boards 30; providing a time-of-day clock; providing a "watchdog" timer to reset the system and sound an external alarm in the event of a software malfunction; and providing "broadcast" logic to permit a Packet Multiplexer Board 32 to address all of the plurality of Speech Processor Boards 30 by means of a single command. Since such conventional hardware is well-known to one of ordinary skill in the art, Utility Logic Board 38 will not be discussed further herein.

Referring now to Fig. 3, a Speech Processor Board 30 is depicted in block diagram format. Each SPB 30 interfaces with two bidirectional telephone lines 10a and 10b by means of Telephone Interfaces 42a and 42b. Telephone Interfaces 42a and 42b comprise impedance matching and filtering circuitry as well as amplifiers to modify the incoming and outgoing audio levels and circuitry to detect DTMF (i.e., "Touchtone") digits.

Data manipulation within SPB 30 is under

-14-

the control of three microprocessor denoted MPU 44, DSP-1 46a, and DSP-2 46b. MPU 44 is a general purpose microprocessing unit which controls all of the input/output operations of SPB 30. It may for example
5 be a type M68000 microprocessor manufactured by Motorola Incorporated of 3501 Ed Bluestein Boulevard, Austin, Texas. DSP-1 46a and DSP-2 46b are special purpose numerical microprocessors utilized for digital signal processing tasks and must be capable of performing
10 complex numerical calculations with high throughput. They may, for example, be type TMS320 microprocessors manufactured by Texas Instruments Incorporated, of P.O. Box 5012, Dallas, Texas. Each such processor serves one telephone channel and processes information
15 flowing in both directions.

Each speech processor board SPB 30 includes random access memory that is divided into six distinct memory areas. Common RAM 48 interfaces both MPU 44 and Common Bus 40. This memory area is addressable
20 for both read and write operations by both MPU 44 and by a Packet Multiplexer Board 32 serving as bus "Master". Common RAM 48 thus serves as an exclusive "gateway" for data interchanges between SPB 30 and a Master PMB 32. It also serves as a storage area
25 for the program of MPU 44. A second memory area 50 is addressable for read and write operations by only MPU 44. This memory area is used as a working area by MPU 44 during execution of its program. Third and fourth memory areas, denoted Voice RAM-1 52a and
30 Voice RAM-2 52b are addressable for both read and write operations by MPU 44 and by DSP-1 46a or DSP-2 46b, respectively. These two memory areas are used by DSP-1 46a and DSP-2 46b as working areas during processing of both outgoing and incoming packets for
35 the two voice channels. Finally, memory areas 54a and 54b are addressable for both read and write operations by DSP-1 46a and by DSP-2 46b, respectively, but by

-15-

MPU 44 for write operations only. These two areas serve as storage areas for the programs of DSP-1 46a and DSP-2 46b, respectively. During system initialization, programs for MPU 44, DSP-1 46a and DSP-2 46b are copied from PROM memory in a Master PMB 32 to Common RAM 48 in SPB 30 by means of a "broadcast" transaction on Common Bus 40. The programs for DSP-1 and DSP-2 are thereupon transferred to the appropriate program storage areas, 54a, and 54b, respectively, by action of MPU 44.

MPU 44 recognizes six hardware interrupts. A Master PMB 32 can interrupt MPU 44 via Common Bus 40 and Master Interrupt line 56. The digital signal processors DSP-1 46a and DSP-2 46b can each interrupt MPU 44 via interrupt lines 58a and 58b, respectively. In addition, a set of three timers 60 interrupts MPU 44 via a set of three interrupt lines 62 to provide timing references. One of these timing interrupts occurs periodically to identify a sampling interval of 167 microseconds. The other two timers provide interrupts to MPU 44 at one and three millisecond intervals, respectively, and are used in the implementation of less frequently occurring signalling tasks.

MPU 44 transfers data to and from Telephone Interfaces 42a and 42b by means of MPU I/O Ports 64. Telephone signalling information is transferred directly to and from Telephone Interfaces 42a and 42b via signalling lines 66a and 66b, respectively. Filtered voice information coming from Telephone Interfaces 42a and 42b is digitized by A/D converter 68 and the resulting digital samples are transferred to MPU I/O Ports 64. Digital samples of voice information going to Telephone Interfaces 42a and 42b are transferred from MPU I/O Ports 64 to D/A converter 70 and the resultant analog signals are then communicated to Telephone Interfaces 42a and 42b for filtering and

-16-

level shifting.

In operation, "virtual circuits" are first established between a Speech Processing Board 30 and one or two other Speech Processing Boards 30 at remote locations in the system. Thereafter, the first SPB 30 accepts voice signals on telephone lines 10a and 10b, converts them to packets of digital information, and places the packets in Common RAM 48 for transmission by a Master Packet Multiplexer Board 32. At the other ends of the "virtual circuits", identical Speech Processing Boards 30 are receiving these packets of digital information in their Common RAMs 48, converting the numbers back into analog signals, and applying these analog signals to the appropriate ones of their interfaced telephone lines 10a or 10b. The first SPB 30 is said to be analyzing speech while the second two SPBs 30 are said to be synthesizing speech. Simultaneously with these operations, the second SPBs 30 are also analyzing speech signals received on their own telephone lines while the first SPB 30 is synthesizing the results. Thus, each SPB 30 is capable of both analyzing and synthesizing speech for two telephone "virtual circuits" simultaneously.

In addition to the tasks of speech analysis and synthesis, each SPB 30 is also capable of performing signalling functions. For each of its two incoming telephone lines 10a and 10b, the SPB 30 identifies on-hooks, off-hooks, dial pulses, valid DTMF digits, and WINKs. It encodes these events into special signalling packets and places these packets in Common RAM 48 for transmission by a PMB 32 to the SPBs 30 at the other ends of the "virtual circuits." The first SPB 30 also receives signalling packets in its Common RAM 48 that were encoded by the remote SPBs 30. It thereupon decodes each such packet's contents and performs the signaling function identified therein on the appropriate telephone line, 10a or 10b.

-17-

Still referring to Figure 3, the tasks of inputting data for speech analysis and outputting data resulting from speech synthesis are periodically initiated every 167 microseconds by virtue of MPU 44 receiving an interrupt from a hardware Timer 60 via an interrupt line 62. MPU 44 thereupon commands A/D circuitry 68 to prepare a digital sample of the voice signal coming from each Telephone Interface, 42a, and 42b, and transfers same via MPU I/O Ports 64 to Voice RAM-1 52a and Voice RAM-2 52b, respectively, for analysis. During this same routine, MPU 44 transfers a digital sample of synthesized speech from each of the Voice RAMs, 52a and 52b, to D/A circuitry 70 via MPU I/O Ports 64 for conversion to analog signals to be communicated to Telephone Interfaces 42a and 42b, respectively.

In between the times that MPU 44 is accessing Voice RAMs 52a and 52b, Voice RAMs 52a and 52b are each employed as working areas by the two Digital Signal Processors, DSP-1 46a and DSP-2 46b, respectively, during implementation of speech analysis and synthesis algorithms stored in their respective program memories 54a and 54b.

During implementation of speech analysis, DSPs 46a and 46b read the digital samples stored by MPU 44. The DSPs periodically estimate the background noise power levels from the magnitudes of the stored digital samples. Samples representing input power levels sufficiently larger than background are assumed to describe speech and are processed accordingly. For such samples, the DSPs perform speech compression computations on successive groups and store the resultant compression variables back in the same Voice RAM, 52a or 52b, respectively. When a DSP has processed an appropriate number of samples, which may range from about 60 to about 300, it either sets a flag in its respective Voice RAM or it interrupts MPU 44

-18-

via interrupt line 58a or 58b to inform MPU 44 that a complete frame of speech compression variables has been prepared. In response, MPU 44 packs the frame into a minimum-length bit string and writes this string into Common RAM 48. MPU 44 then appends a packet header to the data string and sets a flag in Common RAM 48 to indicate to the Master PMB 32 that a packet is ready for collection.

Telephone speech patterns are characterized by finite spurts of speech separated by discrete pauses. When the power level represented by the inputted samples has approached the estimated background level sufficiently closely, the frame preparation sequence is terminated. However, one last frame identified as compressed background noise is prepared by the DSP. Like the preceding speech frames, this background frame is packed into a minimum-length bit string and written, along with a packet header, in Common RAM for collection by Master PMB 32. Thus, each spurt of packetized speech will end with a background noise packet. During pauses in speech, speech packets are not normally prepared. However, special background noise packets containing updates of compressed background noise information are periodically generated at a very slow rate such as, for example, once every two seconds.

Although MPU 44 is not directly involved in the calculation of speech compression variables, certain processing options can be controlled by MPU 44 through its ability to write into DSP program memories 54a and 54b. This feature is utilized in the present system to provide numerical feedback from Master PMB 32 to the various SPBs 30 in the terminal. A Master PMB 32 periodically broadcasts a number to the Common RAMs 48 of the various SPBs 30. This number indicates the current size of a moving average of the lengths of queues of packets awaiting transmission on the

-19-

serial digital channels. At each SPB 30, the MPU 44 periodically reads this number and modifies the DSP programs stored in RAM areas 54a and 54b accordingly. Smaller numbers cause the DSPs 46a and 46b to produce larger frames which more accurately describe the voice signal. Larger numbers have the opposite effect and cause the DSPs to produce smaller frames thereby reducing the length of the transmission queues. This numerical feedback technique dynamically adjusts the computational speech compression algorithm in accordance with the current total digital data load. It permits servicing a large number of telephone lines while still greatly reducing the likelihood of having to discard packets during periods of abnormally high data loading.

The speech synthesis procedure begins with a Master PMB 32 writing a speech packet into an input queue area in Common RAM 48 and setting a flag to indicate its arrival to MPU 44. There are two such input queues, one serving each telephone channel, and the packet is placed in the appropriate queue. MPU 48 periodically checks flags in Voice RAMs 52a and 52b to see whether either DSP desires more input data for speech synthesis. If data is desired and a packet is available in Common RAM 44, MPU 44 expands the packet data into a frame of speech compression variables, writes this frame into an input buffer in the appropriate Voice RAM 52a or 52b, and sets a flag in the Voice RAM to inform the appropriate DSP 46a or 46b of the data frame's availability.

DSPs 46a and 46b continually process any frames of speech compression variables found to be available in their input buffers. By means of an appropriate computational inverse speech compression algorithm, they synthesize approximations to the original digitized samples of speech and write these approximations into output FIFO buffers in their respective Voice RAMs. The approximated digital samples are periodically

-20-

removed from these output FIFOs and transferred to the appropriate D/A circuitry 70 by MPU 44 during the same Timer interrupt routine that is used to bring digitized samples of speech from A/D circuitry 68 into Voice RAM for analysis. Thus, one approximated digital sample of synthesized speech is removed from the output FIFO buffer of each Voice RAM, 52a and 52b, every 167 microseconds.

During speech pauses, no data will be available for processing in a DSP's input buffer in Voice RAM. During these periods, a DSP continually fills its output FIFO buffer with approximated digital samples of representative background noise synthesized from data received earlier in periodically updated background noise information packets.

When speech compression variables first appear in the input buffer indicating the beginning of a spurt of speech, the DSP synthesizes the appropriate digital samples but does not place them at the "head of the line" in the output FIFO buffer. Instead, an intentional delay is introduced by placing the beginning sample a fixed number of samples back from the sample that is next in line to be outputted. This number may, for example, be 300 samples, which corresponds to a time delay of 50 milliseconds. Thus, even after the beginning samples of the speech spurt have been synthesized, MPU 44 will continue to output background noise samples to D/A circuitry 70 for a fixed length of time equal to this Voice RAM output FIFO buffer delay. As a speech spurt progresses, this buffer delay will randomly shrink and grow as a result of statistical variations in packet arrival times. Unless a packet is lost or discarded, however, the nominal buffer delay will remain constant. This nominal buffer delay is chosen to be large enough to buffer against the occurrence of gaps in speech due to packet delays under worst case data loading

-21-

conditions. At the transmitting PMB 32, a new packet will be discarded rather than queued if it cannot be transmitted within the receive buffer's delay period.

5 The end of the speech spurt is recognized
by DSP 46a or 46b by the background noise information
packet that terminates the sequence of speech packets.
Upon receiving a background noise frame in its input
buffer in Voice RAM, the DSP follows the synthesized
speech samples in its output buffer with synthesized
10 background noise samples and then continues to fill
its output buffer with synthesized background noise
samples for the duration of the pause.

 The DSP will recognize that one or more
packets have been lost or discarded if there is a
15 gap in speech data available to the DSP that is not
preceded by a background noise information packet.
In this case, the DSP re-outputs samples synthesized
from the last speech information frame received and
then fills its output buffer with as many background
20 noise samples as are required to recover the desired
nominal buffer delay. Although this procedure will
produce a short "glitch" in the synthesized speech,
a terminal's ratio of telephone line connections to
total digital channel capacity is so chosen that at
25 full data loading, the occurrence of "glitches" due
to discarded packets falls within industry standards
for acceptable speech clipping.

 Fig. 4 depicts a block diagram of the principal
data and control paths of either of the Packet Multiplexer
30 Boards (PMBs) 32. All operations on a particular
PMB 32 are under the control of Microprocessor Unit
(MPU) 72. MPU 72 is a general purpose microprocessor
and may, for example, be a type 80186 microprocessor
manufactured by the Intel Corporation of 3065 Bowers
35 Avenue, Santa Clara, California.

 MPU 72 interfaces directly to Local Bus
74 which, in turn, interfaces to Common Bus 40 through

-22-

Bus Interface Logic 76. Bus Interface Logic 76 permits MPU 72 to serve as a Common Bus Master and initiate read and write transactions to the Common RAMs 48 located on the various Speech Processor Boards 30. It also permits an MPU 72 to execute a Bus Exchange Protocol with another MPU 72 located on a different Packet Multiplexer Board 32 in order to acquire or relinquish control of Common Bus 40. In addition to Bus Interface Logic 76, Common Memory 78 also interfaces both Local Bus 74 and Common Bus 40. Accordingly, Common Memory 78 can be accessed for read and write operations by both the resident MPU 72 on the same board as Common Memory 78 and by a remote MPU 72 located on a different Packet Multiplexer Board 32 and having control of Common Bus 40.

Programmable Read Only Memory (PROM) 80 and RAM 82 are addressable only by the MPU 72 resident on the same board. PROM 80 contains the program of MPU 72, and RAM 82 is used for temporary storage of flags and data during execution of that program. In addition, at least one PMB 32 in the terminal will have the programs of MPU 44 and DSP 46a and 46b of the various SPBs 30 stored in its PROM 80. As described earlier, these programs are transferred to the various SPBs 30 via Common Bus 40 during initialization of the terminal. Operator monitoring and control of PMB 32 is provided through CRT Interface 84 which interfaces with Local Bus 74.

MPU 72 controls data flow to the outgoing serial digital channels 34 as well as data flow from the incoming serial digital channels 36. This control is exercised by the programming of Serial Communications Controller 86, Outgoing DMA (Direct Memory Access) Controller 88, and Incoming DMA Controller 90. The performance of the DMA programming tasks takes place during interrupts that are coordinated by Interrupt Controller 92 along with Programmable Timer 94. Serial

-23-

data flowing from Serial Communications Controller 86 to the outgoing serial digital channels 34 passes through Serial Transmitter (TX) Interface 96. Serial data flowing from the incoming serial digital channels 36 to Serial Communications Controller 86 passes through Serial Receiver (RX) Interface 98.

Still referring to Fig. 4, events leading to the transmission of speech packets over a serial digital communication channel 34 may be described by the following sequence:

MPU 72 routinely polls the output buffer flags in the Common RAMs 48 of the various SPBs 30 via Common Bus 40. When it finds a packet that is ready for collection, it copies the packet into Common Memory 78 and resets flags in Common RAM 48 to free the buffer area for re-use by the MPU 44.

The packet, now residing in Common Memory 78, is logically attached to the shortest one of the four queues serving the four outgoing serial communication channels. The use of separate queues facilitates channel operations. As those skilled in the art will appreciate however, a single queue serving all four channels could also be employed. If all queues have reached a maximum size, the packet is simply discarded since it would not reach the receiver within the time delay period allowed by the receiver's output buffer. If this is not the case, however, the packet is queued for transmission.

The actual transmission of the queued packets is performed as the result of a byte-by-byte direct memory access transfer from Common Memory 78 to Serial Communications Controller 86 under the control of Outgoing DMA Controller 88. DMA Controller 88 serves all four outgoing channels. Each Channel is separately programmed by MPU 72 for the starting address and number of bytes of the next packet in the channel's queue. Once a DMA channel is programmed and unmasked,

-24-

the DMA controller takes over and transfers consecutive bytes from Common Memory 78 to Serial Communication Controller 86 via local bus 74. The consecutive bytes are converted to serial format by Serial Communications Controller 86 and transmitted over the appropriate channel by means of Serial TX Interface 96. When the pre-programmed number of bytes has been transferred, Serial Communications Controller 86 appends a special flag byte, 01111110, to the serial data stream to denote the packet's end. In addition, MPU 72 receives an End of Process (EOP) interrupt from DMA Controller 88 via Interrupt Controller 92. During the resulting interrupt-level routine, MPU 72 consults tables in RAM 82 to identify the starting address of the next packet in the channel's transmission queue and then reprograms DMA Controller 88 accordingly. The transmission process will continue in this manner as long as packets are available in the channel's transmission queue. When packets are no longer available, the channel reverts to "idle" status. An "idle" channel continuously transmits flag bytes, 01111110, generated by Communications Controller 86.

While MPU 72 services the transmission queues, it periodically broadcasts a number to the Common RAMs 48 on the Speech Processor Boards 30 indicating the current size of a moving average of the transmission queue lengths. As described previously, MPUs 44 utilize this information to provide numerical feedback which dynamically adjusts the coarseness of the computational speech compression algorithm in accordance with the current total data load.

Speech packets are transmitted over the serial digital channels without check bytes since the delay caused by retransmitting a packet containing an error would be prohibitively long for communicating speech. Data errors due to transmission problems may therefore cause occasional impairments of the

-25-

received speech. Such occasional impairments are of minor importance and will not ordinarily be noticed, however. As described more fully below, the system mixes speech packets with data packets containing control and signalling information. These data packets include a CRC code for error checking and are retransmitted according to a standard data transmission protocol (LAP-B) if found to be in error.

Continuing to refer to Fig. 4, the sequence of events related to the reception of speech packets on a serial digital communication channel 36 will now be detailed:

Packets arriving on one of the four serial channels 36 pass through the Serial Receiver Interface 98 to the Serial Communications Controller 86. The serial data is thereupon converted to parallel format and transferred byte-by-byte to an input buffer area of common memory 78. This transfer is a direct memory access transfer under the control of Incoming DMA Controller 90.

When Serial Communications Controller 86 receives the special flag byte which had been inserted to denote the end of a packet, an interrupt signal is generated and communicated to MPU 72 via Interrupt Controller 92. As a result of this action, the program of MPU 72 transfers control to an interrupt-level routine.

Upon entering the interrupt-level routine, MPU 72 consults tables in RAM 82 to determine the starting address of the next available buffer in Common Memory 78. It then programs the appropriate channel of Incoming DMA Controller 90 accordingly to prepare to transfer the next incoming packet into this new buffer area.

Following the programming of Incoming DMA Controller 90, MPU 72 examines the header of the newly arrived packet in Common Memory 78. If this header

-26-

identifies the packet as a speech packet, MPU 72 .
It transfers the packet via Common Bus 40 to the
appropriate telephone channel buffer in Common RAM
48 on the appropriate Speech Processor Board 30 as
5 identified by the address in the packet header. A
flag is then set in Common RAM 48 to notify MPU 44
of the packet's arrival. MPU 44 routinely inspects
the buffer flags in Common RAM 48 looking for fresh
packet arrivals.

10 In this fashion, speech packets will continue
to be transferred to the appropriate SPBs 30 as long
as they continue to arrive on serial digital
communications channels 36.

Referring now to Fig. 5, the packet format
15 as it is communicated serially over a digital
communication channel is disclosed. Each packet begins
with a Packet Header and ends with a terminating Flag
Byte (01111110). As disclosed above, this Flag Byte
is automatically appended to the end of the packet
20 by Serial Communications Controller 86.

Two packet formats are disclosed in Fig.
5; a format appropriate to transmission of a frame
of digital compression variables, and a format appropriate
to the transmission of all other types of digital
25 data. The former is referred to as a Speech Packet
and the latter is referred to as a Data Packet. The
Packet Header of both packet formats begins with an
eight-bit Type Byte, and this Type Byte identifies
whether the ensuing packet is a Speech Packet or a
30 Data Packet. For both packet formats, the Type Byte
conveys only four bits of digital information, and
the other four bits are utilized as checkbits to ensure
accuracy of the four information bits.

If the four information bits of the Type
35 Byte represent a binary number between 0 and 3 - that
is, if the higher order two of these four bits are
zeros - the packet is identified as a Speech Packet.

-27-

In this case, the Packet Header is two bytes, or sixteenbits long. A Speech Packet Header contains a ten-bit address field consisting of an eight-bit Address Byte along with the two lower order bits of the Type Byte information field. Thus, there are 1024 unique digital codes available for establishing virtual circuits between speech sources and corresponding speech sinks.

If the four information bits of the Type Byte represent a binary number between 4 and 15, the packet is identified as a Data Packet, and the type of data being conveyed is identified by the value of this binary number. Thus, provision has been made for communicating up to twelve different types of data. At the present time, three different types of data have been differentiated:

-Telephone Signalling or Line Control Data: Data Packets of this type convey signalling information such as on-hooks, off-hooks, and dialing codes from a Speech Processing Board 30 at one location to a corresponding Speech Processing Board 30 at a second location for appropriate interfacing to a telephone line.

-Multiplexer Control Data. Data Packets of this type convey messages between a Packet Multiplexer Board 32 at one location and a Packet Multiplexer Board 32 at a second location. They are used for a variety of control purposes including the establishment of virtual circuits linking sources to corresponding sinks.

-User Data. Data Packets of this type convey data provided in digital format by a system user data source for delivery in digital format to a system user data sink.

-28-

Continuing to refer to Fig. 5, a Data packet Header is seen to be four bytes long. In addition to the Type Byte, the Packet Header contains a single Packet Control Byte (PCB) and a two-byte Address field. The two-byte Addressfield provides for the identification of individual Data Packets by any one of up to 65535 unique digital codes. The Packet Control Byte contains information for data link level control and conforms with the Link Access Protocol (LAP-B) defined in the X25 standard. As those skilled in the art will appreciate, the purpose of this byte is to provide means for retransmission of a Data Packet if it is found to be in error. Immediately following the data in the packet is a two-byte Cyclic Redundancy Check (CRC) code. These bytes provide means for checking a received Data Packet to determine whether the data has been corrupted in transmission. Thus, the Data Packet Format provides both means for detecting data transmission errors and means for implementing retransmission when such errors are detected.

The system as disclosed herein above inputs telephone speech signals in analog format and outputs telephone speech signals in analog format. As those skilled in the art will appreciate, however, the input and output formats could also be digital. In fact, certain simplifications can be accomplished when telephone signals are interfaced to a digital telephone terminal in multiplexed serial digital format rather than in analog format since the operations of filtering, sampling, analog to digital conversion, and digital to analog conversion are thereby avoided. Furthermore, as those skilled in the art will appreciate, digital data other than speech data can also be assembled into packets and communicated from a data source to a data sink. Thus, the system disclosed herein is broadly capable of simultaneously communicating a mixture of analog telephone speech signals, digital telephone speech signals, and digital data signals from a plurality

-29-

of appropriate sources at a first location to corresponding ones of a plurality of appropriate sinks at a second location in digital packet format.

-30-

CLAIMS

1. A method for communicating speech signals from a first location to a second location over a digital communication medium comprising the steps of:

providing a speech signal of predetermined bandwidth in analog signal format at said first location;

periodically sampling said speech signal at a predetermined sampling rate to provide a succession of analog signal samples;

representing said analog signal samples in a digital format thereby providing a temporal sequence of binary digital samples;

dividing said temporal sequence of binary digital samples into successive groups of binary digital samples;

transforming respective ones of said groups of binary digital samples into corresponding frames of digital compression variables by means of a computational speech compression algorithm whereby the compression ratio of the number of binary bits in respective ones of said frames to the number of binary bits in the corresponding ones of said groups is less than one;

appending an identifying header to respective ones of said frames of digital compression variables to provide a succession of speech information packets;

transmitting said speech information packets over said digital communication medium;

receiving said speech information packets at said second location;

removing said identifying header from

-31-

received ones of said speech information packets to recover respective corresponding ones of said frames of digital compression variables;

successively synthesizing groups of binary digital words from respective ones of said frames of digital compression variables by means of a computational inverse speech compression algorithm, said respective groups of synthesized binary digital words being an appropriate representation of the group of binary digital samples corresponding to respective corresponding ones of said frames;

arranging said groups of synthesized binary digital words into a queue in the order of the corresponding ones of said successive groups of binary digital samples;

periodically removing the synthesized binary digital word at the head of said queue at said predetermined sampling rate;

representing said periodically removed words in analog signal format thereby providing a sequence of discrete analog signal values; and

filtering said sequence of discrete analog signal values to approximately reproduce said speech signal of predetermined bandwidth in analog signal format at said second location.

2. A method for communicating speech signals as in claim 1 including the steps of:

determining the average power level of said speech signal provided at said first location;

discontinuing the step of transforming respective ones of said groups of binary digital samples into corresponding frames

-32-

of digital compression variables when said average power level becomes less than a predetermined value, thereby suspending transmission of said speech information packets pursuant to a pause in said speech signal;

substituting special binary digital words for said synthesized binary digital words at said second location when receipt of said information packets at said second location is suspended pursuant to a pause in said speech signal.

3. A method for communicating speech signals as in claim 2 further including the steps of:

periodically transmitting a background noise information packet representative of the ambient background noise associated with said speech signal;

synthesizing said special binary digital words from said background noise information packets.

4. A method for communicating speech signals as in claim 1 wherein said digital communication medium is a serial digital communication medium, and said steps further comprise:

formatting said speech information packets in a serial digital format at said first location;

formatting said speech information packets in a parallel digital format at said second location.

5. A method as claimed in claim 1 wherein said first location includes a plurality of speech sources, said second location includes a plurality of speech sinks, each of said speech sources presenting a speech signal for transmission to a predetermined one of said speech sinks, said method for communicating speech

-33-

signals further comprising the steps of:

establishing respective virtual circuits between respective ones of said speech signal sources and respective predetermined corresponding ones of said speech signal sinks;

assigning at least one circuit identifying code to each of said virtual circuits; and

appending respective ones of said circuit identifying codes to respective ones of said packets whereby packets originating from respective ones of said sources are routed to respective predetermined ones of said speech signal sinks.

6. A method for communicating speech signals as in claim 5 together with the step of dynamically adjusting said compression ratio in inverse relation to the approximate current length of said transmission queue.

7. A method for communicating speech signals as in claim 5 wherein said digital communication medium is a serial digital communication medium, and said steps further comprise:

formatting said speech information packets in a serial digital format at said first location; and

formatting said speech information packets in a parallel digital format at said second location.

8. A method for communicating speech signals as in claim 5, wherein said serial digital communication medium comprises a plurality of serial digital communication channels, further including the steps of:

accumulating said speech information

-34-

packets in a plurality of transmission queues at said first location, each of said queues associated with a predetermined one of said channels;

periodically identifying the shortest one of said transmission queues and accumulating said speech information packets by assigning each speech information packet, as it is made available for accumulation, to the transmission queue then identified as the shortest transmission queue.

9. A method for communicating speech signals as in claim 8 including the step of dynamically adjusting said compression ratio in inverse relation to the approximate current average length of said plurality of transmission queues.

10. A method for communicating speech signals as in claim 9 including the steps of:

determining the average power level of said speech signal presented at respective ones of said speech sources;

discontinuing the step of transforming respective ones of said groups of binary digital samples into corresponding frames of digital compression variables when the average power level of respective ones of said speech signals are less than a predetermined value, thereby suspending transmission of respective speech information packets pursuant to a pause in speech in said respective speech signals;

substituting special binary digital words for respective ones of said synthesized binary digital words at said second location when receipt of respective ones of said speech information packets at said second

-35-

location is suspended pursuant to a pause in speech in said respective speech signals.

11. A method for communicating speech signals as in claim 10 further including the steps of:

periodically transmitting respective background noise information packets representative of the ambient background noise of the speech signal associated with respective ones of said speech sources;

synthesizing respective ones of said special binary digital words from respective ones of said background noise information packets.

12. A method for coupling a plurality of asynchronous digital information packet sources and sinks to a plurality of digital transmitters and receivers, comprising the steps of:

detecting the presence of digital information packets at respective ones of said digital information packet sources;

transferring said digital information packets from said respective digital information packet sources to a transmission local memory;

encoding said digital information packets received from respective ones of said packet source with routing information for routing to a corresponding one of said packet sinks;

arranging said information packets into a plurality of packet transmission queues within said transmission local memory, each queue being operably coupled with a respective one of said digital transmitters;

determining the respective lengths of said transmission queues;

-36-

appending successive ones of said digital information packets to the shortest one of said transmission queues;

detecting the availability for transmission of said information packets of respective ones of said digital transmitters;

transferring the digital information packet at the head of a respective one of said transmission queues from said local memory to the corresponding one of said digital transmitters when said corresponding one of said digital transmitters is available for transmission of information packets;

transmitting respective ones of said digital information packets from said respective digital transmitters to respective ones of said receivers;

transferring said digital information packets from respective ones of said digital receivers to a receiver local memory;

examining respective ones of said digital information packets in said receiver local memory; and

routing said respective digital information packets received from respective ones of said packet source from said local memory to the corresponding one of said digital information packet sinks identified by the respective routing information of each respective information packet.

13. A method as claimed in claim 12 wherein said step of transferring digital information packets from said local transmission memory to one of said digital transmitters and said step of routing digital information packets from respective ones of said digital receivers to said local receiver memory comprise direct memory access transfers.

-37-

14. A method as claimed in claim 12 wherein said digital transmitters are serial digital transmitters and said receivers are serial digital receivers further comprising the steps of:

converting digital information from parallel digital format to serial digital format at respective ones of said plurality of serial digital transmitters; and

converting digital information from serial digital format to parallel digital format at respective ones of said serial digital receivers.

15. A method as claimed in claim 12 further including the step of periodically reporting the current average length of said transmission queues to said digital information packet sources whereby the rate at which said digital information packets are presented at said digital information packet sources can be inversely adjusted in accordance with said average length of said transmission queues.

16. A method for communicating information signals from a first location to a second location over a digital communication medium comprising the steps of:

presenting an information signal as a temporal sequence of binary digital samples;

dividing said temporal sequence of binary digital samples into successive groups of binary digital samples;

transforming respective ones of said groups of binary digital samples into corresponding frames of digital compression variables by means of a computational speech compression algorithm whereby the compression ratio of the number of binary bits in respective ones of said frames to the number

-38-

of binary bits in the corresponding ones of said groups is less than one;

appending an identifying header to respective ones of said frames of digital compression variables to provide a succession of data packets;

transmitting said data packets over said digital communication medium;

receiving said data packets at said second location;

removing said identifying header from received ones of said data packets to recover respective corresponding ones of said frames of digital compression variables;

successively synthesizing groups of binary digital words from respective ones of said frames of digital compression variables by means of a computational inverse speech compression algorithm said respective groups of synthesized binary digital words being an approximate representation of the group of binary digital samples corresponding to respective corresponding ones of said frame;

arranging said groups of synthesized binary digital words into a queue in the order of the corresponding ones of said successive groups of binary digital samples;

periodically removing the synthesized binary digital word at the head of said queue at said predetermined sampling rate to approximately reproduce said information signal at said second location.

17. A method for communicating information signals as in claim 16 including the steps of:

determining the average power level of said information signal provided at

-39-

said first location;

discontinuing the step of transforming respective ones of said groups of binary digital samples into corresponding frames of digital compression variables when said average power level becomes less than a predetermined value, thereby suspending transmission of said data packets pursuant to a pause in said information signal;

substituting special binary digital words for said synthesized binary digital words at said second location when receipt of said data packets at said second location is suspended pursuant to a pause in said information signal.

18. A method for communicating information signals as in claim 17 further including the steps of:

periodically transmitting a background noise information packet representative of the ambient background noise associated with said information signal;

synthesizing said special binary digital words from said background noise information packets.

19. A method for communicating information signals as in claim 16 wherein said digital communication medium is a serial digital communication medium, and said steps further comprise:

formatting said data packets in a serial digital format at said first location;

formatting said data packets in a parallel digital format at said second location.

20. A method as claimed in claim 16 wherein said first location includes a plurality of information signal sources, said second location includes a plurality

-40-

of information signal sinks, each of said sources presenting an information signal for transmission to a predetermined one of said sinks, said method for communicating information signals further comprising the steps of:

establishing respective virtual circuits between respective ones of said sources and respective predetermined corresponding ones of said speech signal sinks;

assigning at least one circuit identifying code to each of said virtual circuits;
and

appending respective ones of said circuit identifying codes to respective ones of said packets whereby packets originating from respective ones of said sources are routed to respective predetermined ones of said speech signal sinks.

21. A method for communicating information signals as in claim 20 together with the step of dynamically adjusting said compression ratio in inverse relation to the approximate current length of said transmission queue.

22. A method for communicating information signals as in claim 21 wherein said digital communication medium is a serial digital communication medium, and said steps further comprise:

formatting said packets in a serial digital format at said first location;
and

formatting said packets in a parallel digital format at said second location.

23. A method for communicating information signals as in claim 20, wherein said serial digital communication medium comprises a plurality of serial digital communication channels, further including the steps

-41-

of:

accumulating said data packets in a plurality of transmission queues at said first location, each of said queues associated with a predetermined one of said channels; periodically identifying the shortest one of said transmission queues and accumulating said data packets by assigning each data packet, as it is made available for accumulation, to the transmission queue then identified as the shortest transmission queue.

24. A method for communicating information signals as in claim 23 including the step of dynamically adjusting said compression ratio in inverse relation to the approximate current average length of said plurality of transmission queues.

25. A method for communicating information signals as in claim 24 including the steps of:

determining the average power level of said information signal presented at respective ones of said sources;

discontinuing the step of transforming respective ones of said groups of binary digital samples into corresponding frames of digital compression variables when the average power level of respective ones of said information signals are less than a predetermined value, thereby suspending transmission of respective data packets pursuant to a pause in said respective information signals;

substituting special binary digital words for respective ones of said synthesized binary digital words at said second location when receipt of respective ones of said

-42-

speech information packets at said second location is suspended pursuant to a pause in said respective information signals.

26. A method for communicating speech signals as in claim 25 further including the steps of:

- periodically transmitting respective background noise information packets representative of the ambient background noise of the information signal associated with respective ones of said sources;

- synthesizing respective ones of said special binary digital words from respective ones of said background noise information packets.

27. A method for communicating information signals as in claim 16, said information signals comprising speech signals, including the steps of:

- providing a speech signal of predetermined bandwidth in analog signal format at said first location;

- periodically sampling said speech signal at a predetermined sampling rate to provide a succession of analog signal samples;

- representing said analog signal samples in a digital format to provide said temporal sequence of binary digital samples;

- representing said periodically removed words in analog signal format thereby providing a sequence of discrete analog signal values at said second location; and

- filtering said sequence of discrete analog signal values to approximately reproduce said speech signal of predetermined bandwidth in analog signal format at said second location.

1/5

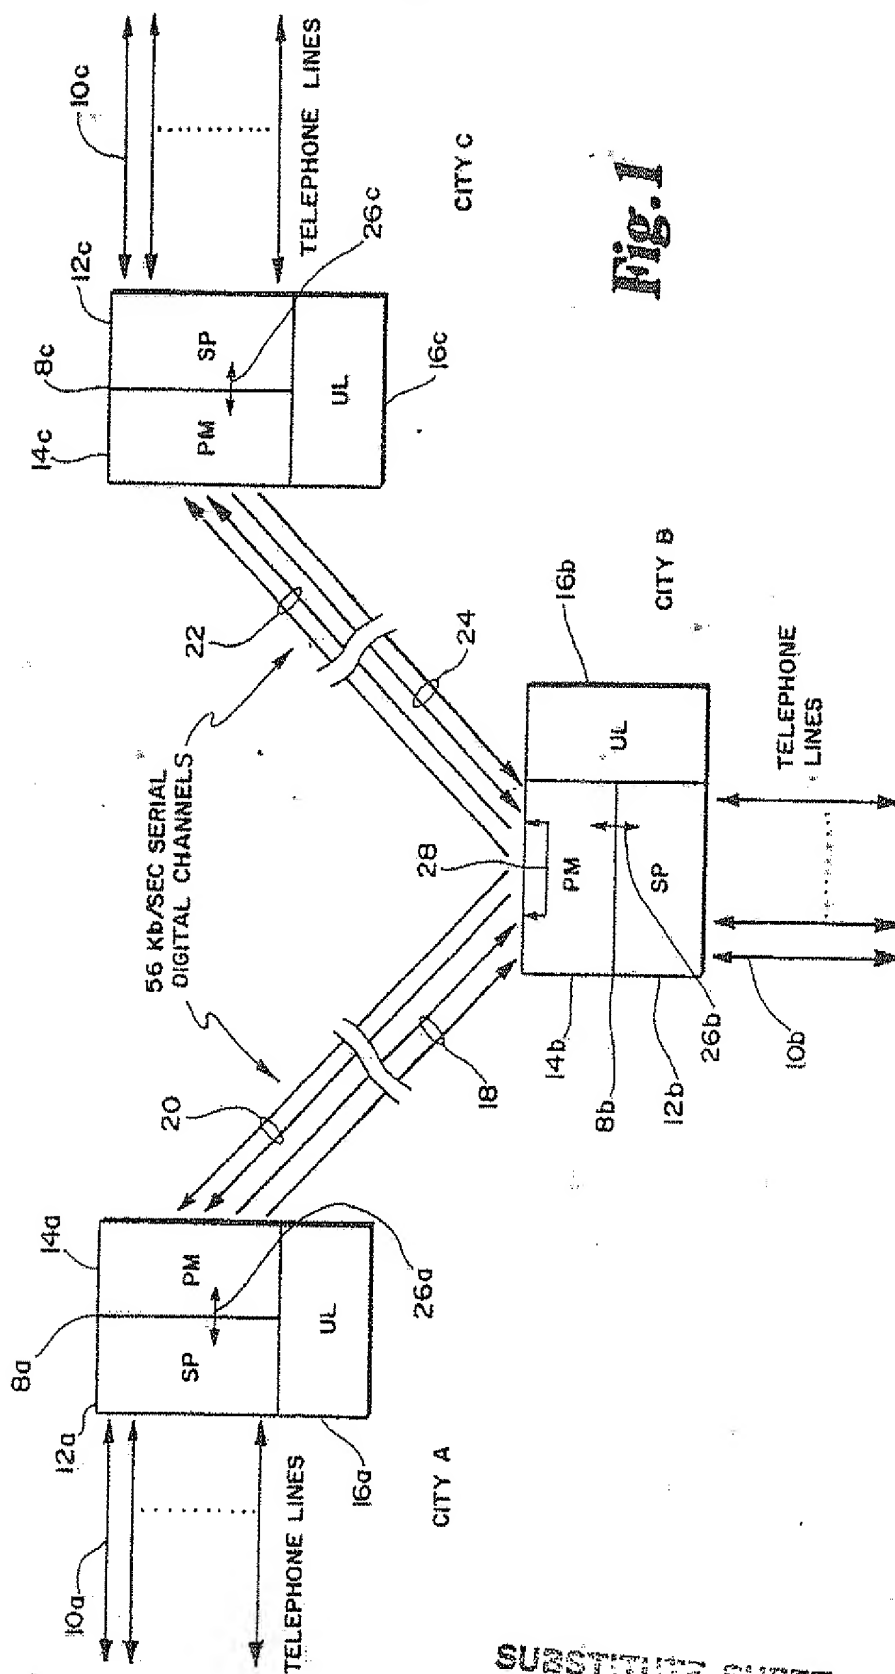


Fig. 1

Substituted Sheet

2/5

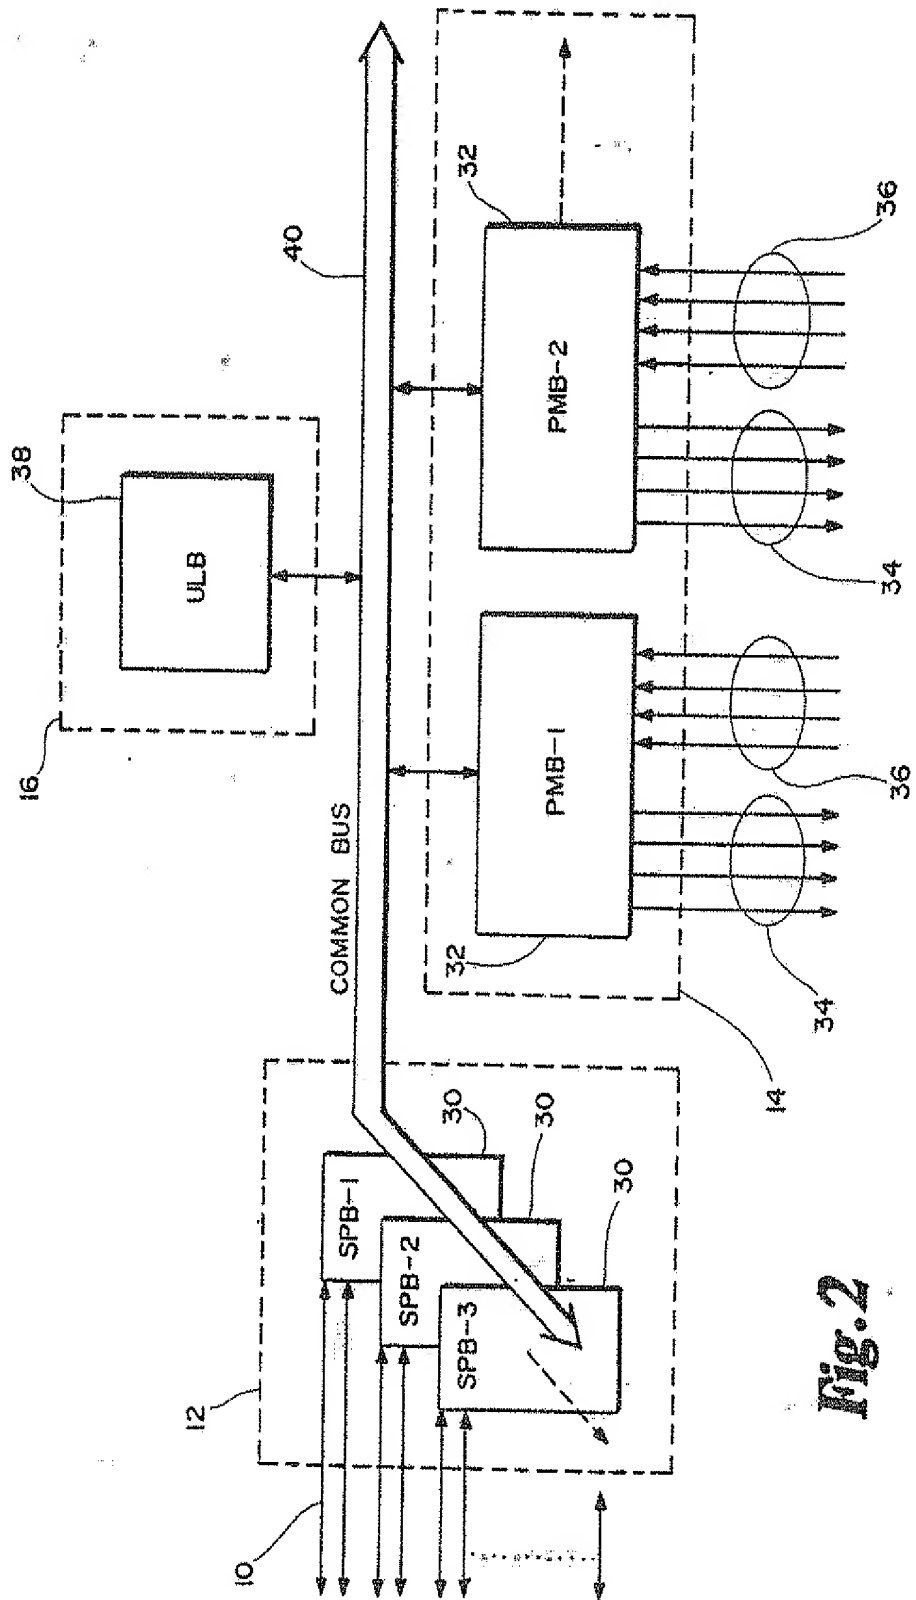


Fig. 2

FIG. 2

3/5

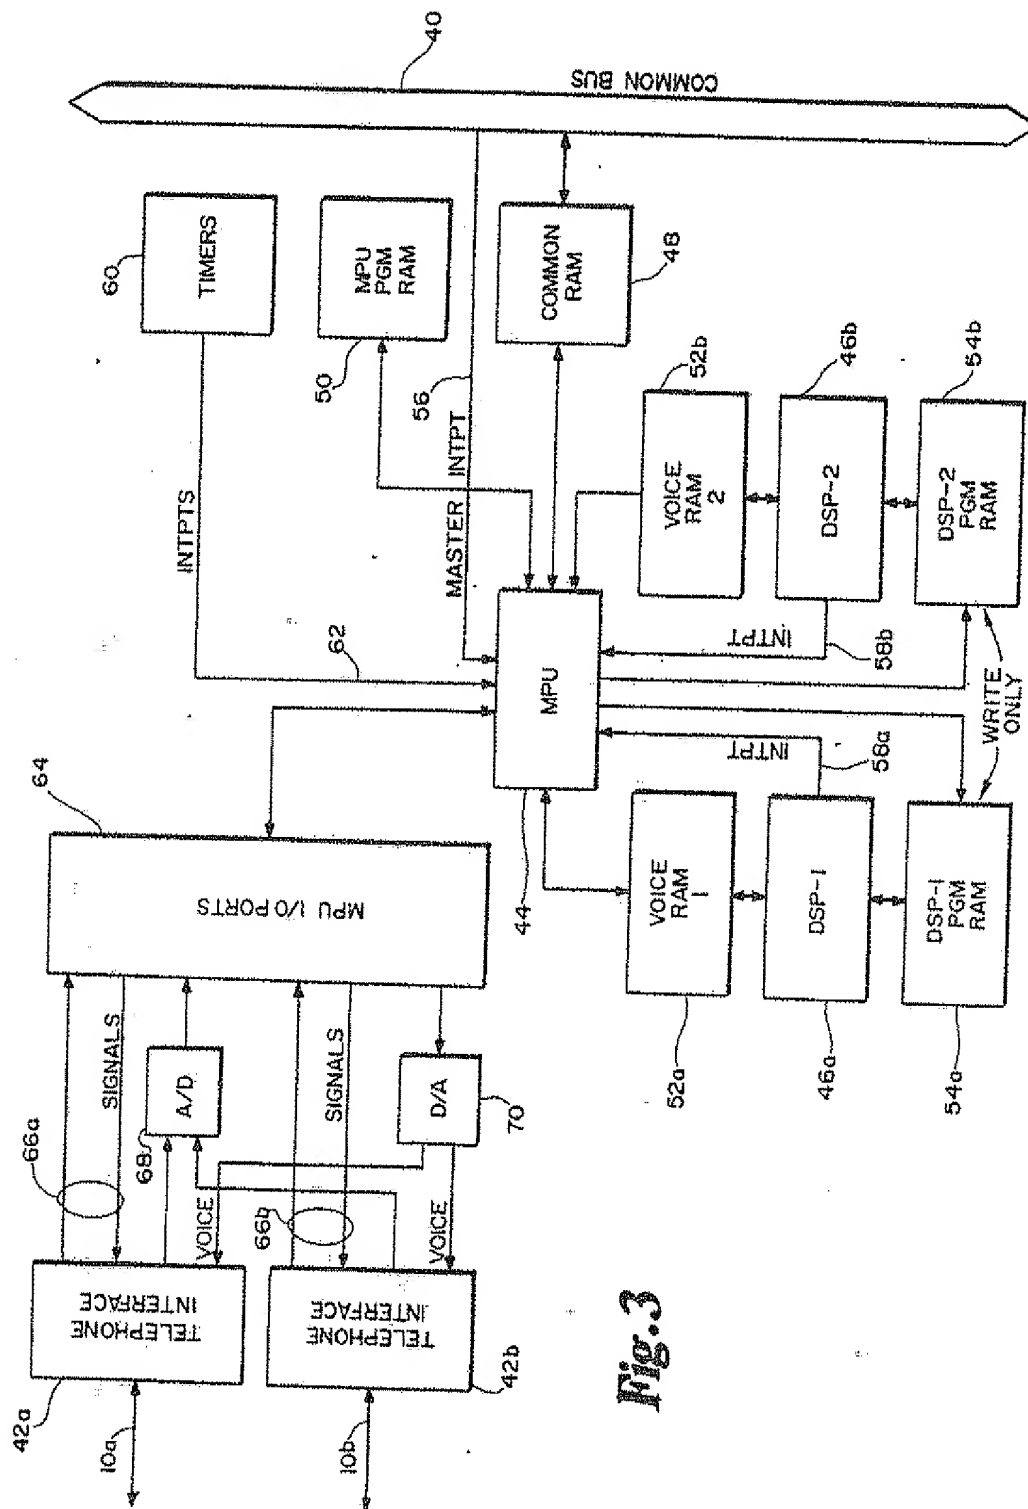


Fig. 3

SUBSTITUTE SHEET

4/5


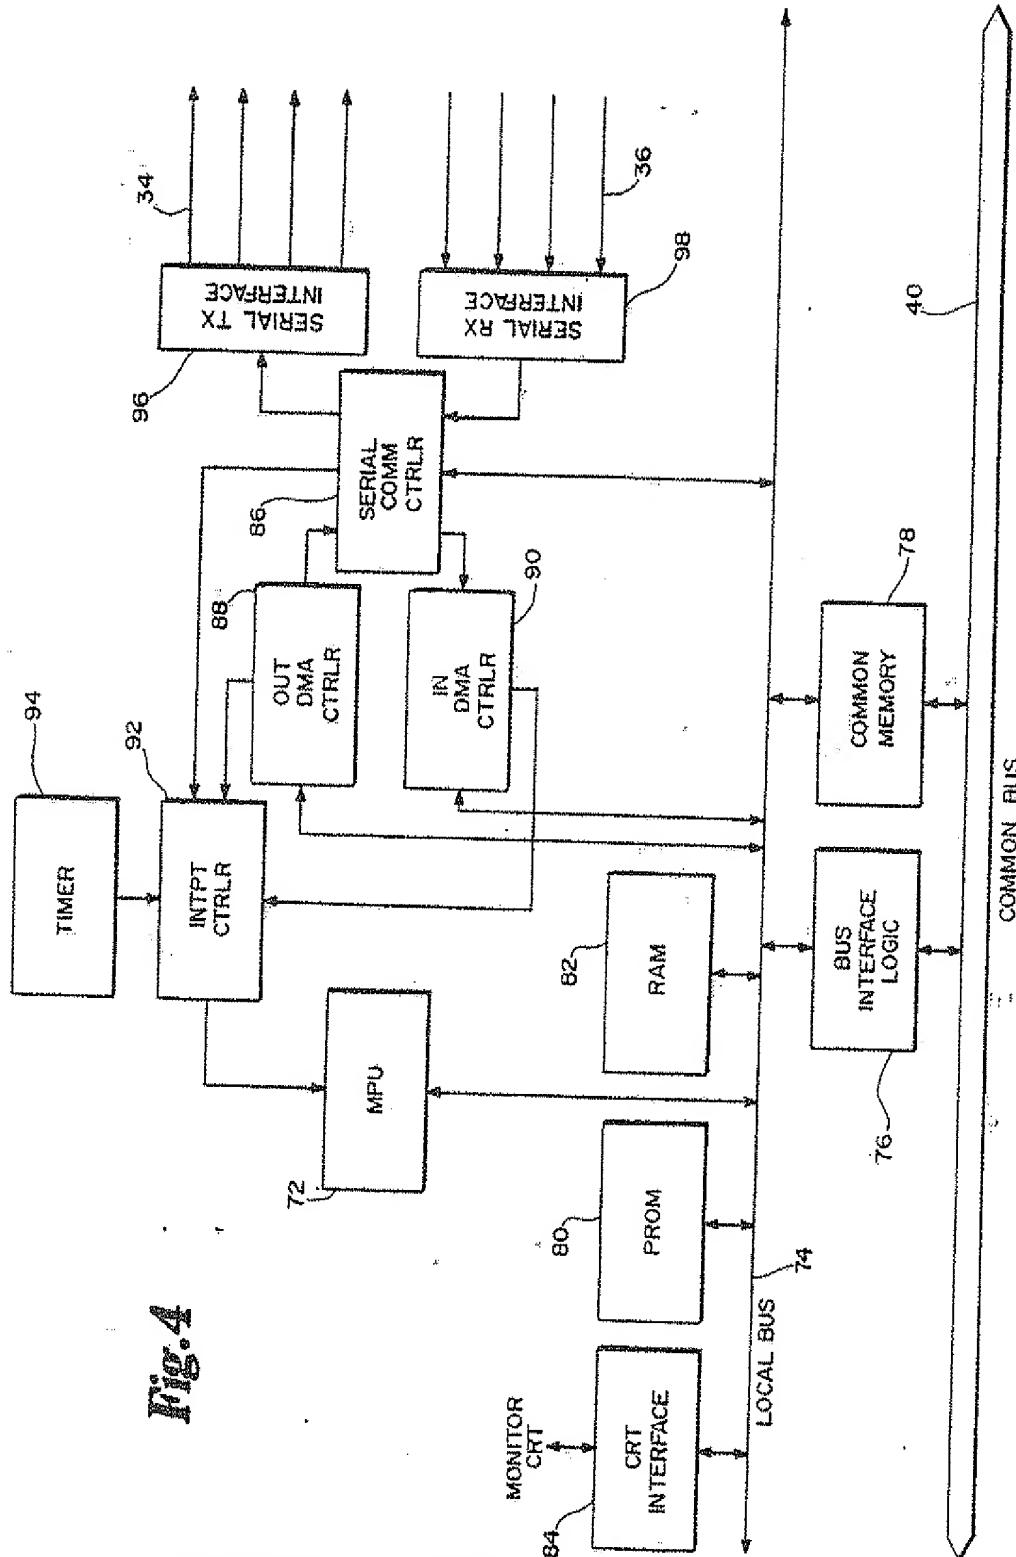


Fig. 4

FIG. 4

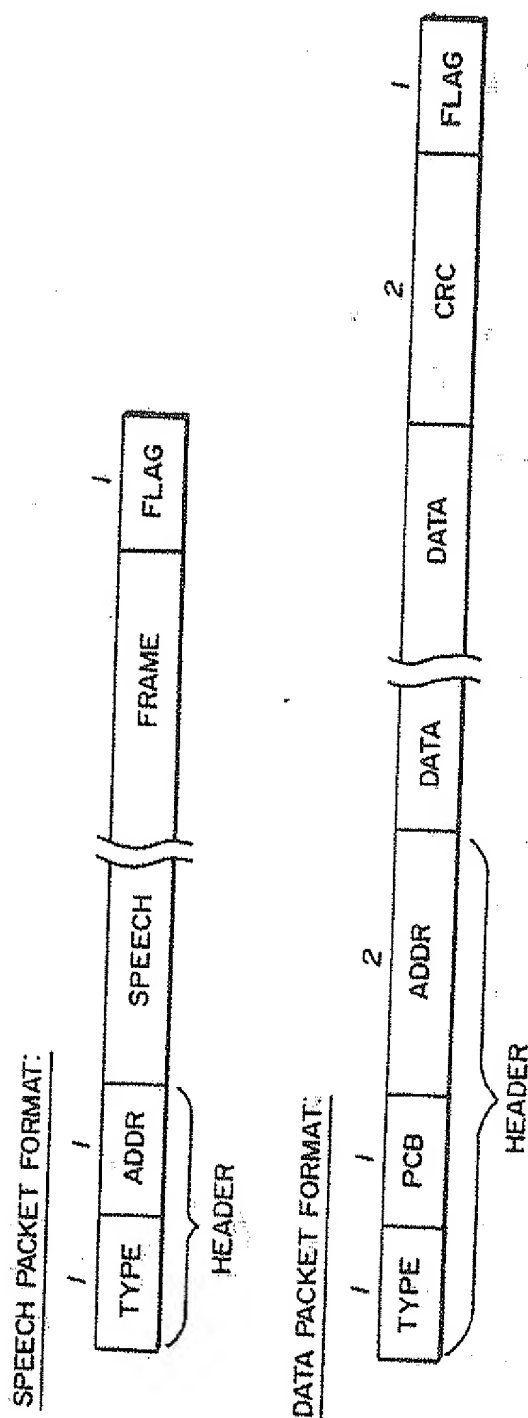

100

INTERNATIONAL SEARCH REPORT

International Application No. **PCT/US86/01721**

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ³ According to International Patent Classification (IPC) or to both National Classification and IPC INT. CL⁴ H04J 3/24, 15/00; H04B 1/66 US CL. 370/94, 118; 375/122		
II. FIELDS SEARCHED Minimum Documentation Searched ⁴ Classification System: U.S. Classification Symbols: 370/60, 94, 118 375/122 Documentation Searched other than Minimum Documentation to the extent that such Documents are included in the Fields Searched ⁴		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴		
Category ¹⁵	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
A	U.S., A, 4,383,316, (SEIDEL) 10 May 1983	
A	U.S., A, 4,503,510, (WEAVER) 05 March 1985	
A	U.S., A, 4,512,013, (NASH ET AL.) 16 April 1985	
A,P	U.S., A, 4,589,110, (ENG ET AL.) 13 May 1986	
<p>* Special categories of cited documents: ¹⁹</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search ² 03 NOVEMBER 1986 International Searching Authority: ISA/US		Date of Mailing of this International Search Report ² 19 NOV 1986 Signature of Authorized Officer to: Curtis A. Kuntz